

Art No. WH

冷拉制钉丝

Bright Hard Drawn Nail Wire

BWG	4 - 6	17 - 18
Tensile Strength Kg/mm <sup>2</sup>	80 - 100	
Packing	50 kgs/coil I.D. about 45 CM	25 kg/coil I.D. about 29 CM.



# 各國線號對照表

# WIRE GAUGE TABLE

S.W.G. British Imperial Standard Wire Gauge  
B.W.G. Birmingham Wire Gauge

B.&S. Brown and Sharpe Wire Gauge  
A.S.W.G. American Standard Wire Gauge

J. de P. Paris Wire Gauge  
W.G. Westphalia Wire Gauge

Gage No.	S.W.G. mm	B.W.G. mm	B.&S. mm	A.S.W.G. mm	A.S.W.G. inch	J. de P mm	W.G. mm
6	4.877	5.156	4.115	4.877	0.1920	1.100	1.00
7	4.470	4.572	3.665	4.496	0.1770	1.200	1.12
8	4.064	4.191	3.264	4.115	0.1620	1.300	1.20
9	3.658	3.759	2.906	3.767	0.1483	1.400	1.30
10	3.251	3.404	2.588	3.429	0.1350	1.500	1.40
11	2.946	3.048	2.304	3.061	0.1205	1.600	1.56
12	2.642	2.769	2.052	2.680	0.1055	1.800	1.66
13	2.337	2.413	1.826	2.324	0.0915	2.000	1.84
14	2.032	2.108	1.628	2.032	0.0800	2.200	2.04
15	1.829	1.829	1.450	1.829	0.0720	2.400	2.20
16	1.626	1.651	1.290	1.583	0.0625	2.700	2.40
17	1.422	1.473	1.151	1.372	0.0540	3.000	2.60
18	1.219	1.245	1.024	1.207	0.0475	3.400	.292
19	1.016	1.067	.9116	1.041	0.0410	3.900	3.40
20	.9144	.8886	.8128	.8839	0.0348	4.400	3.84
21	.8128	.8128	.7239	.8052	0.0318	4.900	4.20
22	.7112	.7109	.6426	.7264	0.0286	5.400	4.65
23	.6096	.6347	.5740	.6553	0.0258	5.900	5.45
24	.5588	.5585	.5105	.5842	0.0230	6.400	5.96
25	.5080	.5078	.4547	.5182	0.0204	7.000	7.00
26	.4572	.4570	.4039	.4597	0.0181	7.600	7.60
27	.4166	.4062	.3607	.4394	0.0173	8.200	8.80
28	.3759	.3555	.3200	.4115	0.0162	8.800	9.40
29	.3454	.3300	.2875	.3810	0.0150	9.400	10.00
30	.3150	.3046	.2540	.3556	0.0140	10.000	
31	.2946	.2539	.2268	.3353	0.0132		
32	.2743	.2286	.2019	.3251	0.0128		
33	.2540	.2031	.1798	.2997	0.0118		
34	.2337	.1777	.1600	.2642	0.0104		
35	.2134	.1269	.1425	.2413	0.0095		
36	.1930	.1016	.1270	.2286	0.0090		
37	.1727		.1112	.2159	0.0085		
38	.1524		.1006	.2032	0.0080		
39	.1321		.0897	.1905	0.0075		
40	.1219		.0897	.1778	0.0070		

## Conversion Table

### WEIGHT

1 lb = 0.4536 kg  
1 kg = 2.2046 lb  
1 L/T = 1016 kg

### LENGTH

1 ft = 30.48 cm  
1 m = 3.281 ft.  
39.37 in.  
1 in = 25.4 mm

### STRENGTH

1 kg/mm<sup>2</sup> = 1.422 lb/in<sup>2</sup>  
1 lb/in<sup>2</sup> = 7.031 × 10<sup>-4</sup> kg/mm<sup>2</sup>

# 水泥钉 Concrete Nails

Art. No. N01

电镀钉 Electro Galvanized			发蓝钉 Blued	
L (in)	D (BWG)	Aoorox. pcs Per lb	L(mm)	D (mm)
1	12	355	20	2
1-1/4	12	282	25	2
1-1/2	12	244	25	2.5
2	12	184	30	3
1	9	182	40	3
1-1/4	9	145	50	3
1-1/2	9	123	60	3.4
2	9	96	70	3.4
2-1/2	8	64	80	3.4
3	7	45	100	4.2
3-1/2	7	40		
4	7	33		



包装：盒装，每盒净重 20 公斤，48 盒装一托盘。

Packing: In box of 20 kgs net each and 48 boxes to a pallet.

# 镀锌四方船钉 Art. No. N03


## Galvanized Square Boat Nails

规格	1 × 14BWG	2 × 12BWG
	1 × 15BWG	2-1/2 × 10BWG
	1 × 16BWG	3 × 8BWG
	1-1/4 × 14BWG	3-1/2 × 7BWG
	1-1/2 × 14BWG	4 × 6BWG
	1-1/2 × 14BWG	5 × 5BWG
	1-3/4 × 13BWG	6 × 4BWG

Uses: Mainly for ship building and other consumption.

包装: 盒装, 每盒净重 20 公斤, 48 盒装一托盘。

Packing: In box of 20 kgs, 48 boxes to a pallet.

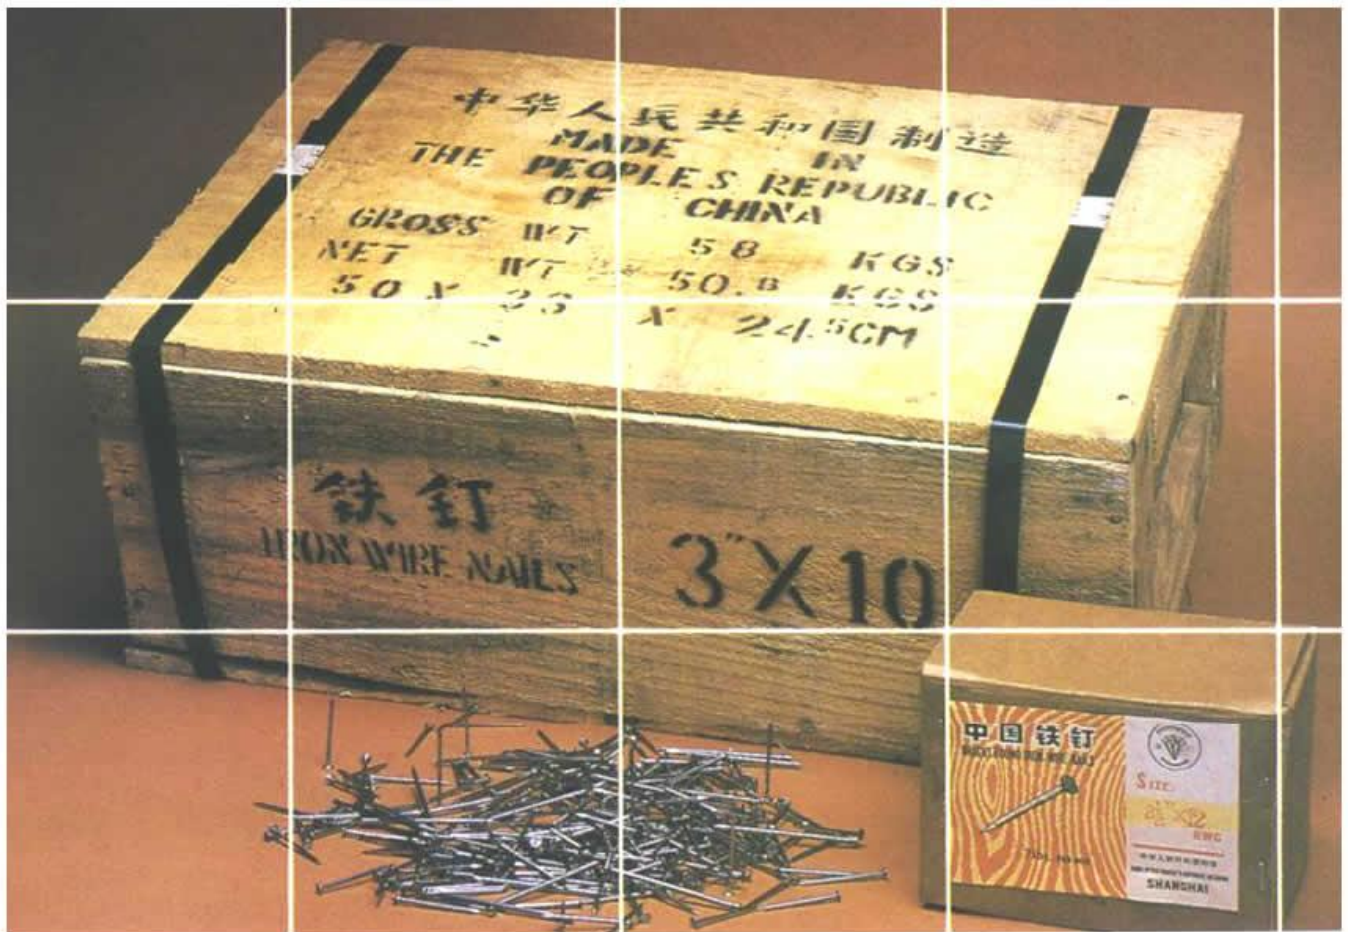

size  
code

2D 3D 4D 5D 6D 7D 8D 9D 10D 12D 16D 20D 30D 40D 50D 60D

length  
(inch)

1 1-1/4 1-1/2 1-3/4 2 2-1/4 2-1/2 2-3/4 3 3-1/4 3-1/2 4 4-1/2 5 5-1/2 6

## 美制普通钉

Art. No. NA10


### Common Nails

Flat Head Diamond Point

Size	L (in)	D.(ASWG)	Diam of Head. in.	Approx. Number per lb.
2d	1	15	11/64	847
3d	1-1/4	14	13/64	543
4d	1-1/2	12-1/2	1/4	294
5d	1-3/4	12-1/2	1/4	254
6d	2	11-1/2	17/64	167
7d	2-1/4	11-1/2	17/64	150
8d	2-1/2	10-1/4	9/32	101
9d	2-3/4	10-1/4	9/32	92
10d	3	9	5/16	66
12d	3-1/4	9	5/16	61
16d	3-1/2	8	11/32	47
20d	4	6	13/32	29
30d	4-1/2	5	7/16	22
40d	5	4	15/32	17
50d	5-1/2	3	1/2	13
60d	6	2	17/32	10

包装：盒装，每盒净重 50 磅，48 盒装一托盘

Packing: In box of 50 lbs net each and 48 boxes to a pallet.

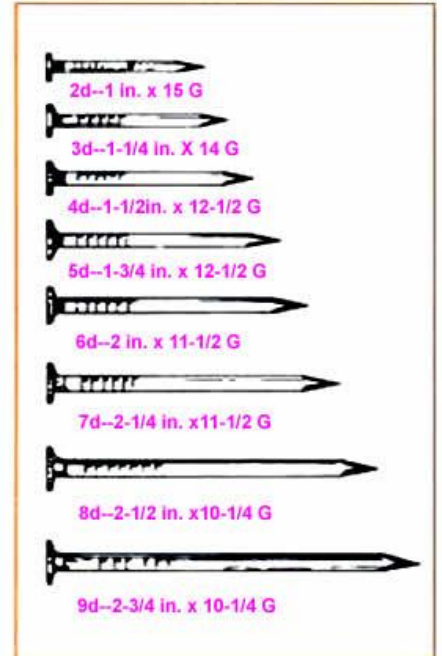

## 油毡钉

Art. No. NA20

### Roofing Nails

l (in)	shank diameter			head diameter		approx. pieces. per lb.
	A.S.W.G.	inch	M/M	inch	M/M	
3/4	11	0.120	3.060	7/16	11-12	346
7/8	11	0.120	3.060	7/16	11-12	305
1	11	0.120	3.060	7/16	11-12	273
1-1/4	11	0.120	3.060	7/16	11-12	228
1-1/2	11	0.120	3.060	7/16	11-12	200
1-3/4	11	0.120	3.060	7/16	11-12	168
2	11	0.120	3.060	7/16	11-12	151
2-1/2	11	0.120	3.060	7/16	11-12	122
3	11	0.120	3.060	7/16	11-12	103

包装：盒装，每盒净重 50 磅，48 盒装一托盘

Packing: In box of 50 lbs net each and 48 boxes to a pallet.



# 包装钉

Art. No. NA 06


## Casing Nails

Flat Countersunk Cupped Head Diamond Point



Size	L(in)	D(ASWG)	Diam of Head. Gage No. <sup>1</sup>	Approx. Number per lb.
2s	1	15-1/2	12-1/2	1090
3d	1-1/4	14-1/2	11-1/2	654
4d	1-1/2	14	11	489
5d	1-3/4	14	11	414
6d	2	12-1/2	9-1/2	244
7d	2-1/4	12-1/2	9-1/2	215
8d	2-1/2	11-1/2	8-1/2	147
9d	2-3/4	11-1/2	8-1/2	133
10d	3	10-1/2	7-1/2	96
12d	3-1/4	10-1/2	7-1/2	88
16d	3-1/2	10	7	74

包装：盒装，每盒净重 50 磅，48 盒装一托盘  
Packing: In box of 50 lbs net each and 48 boxes to a pallet.

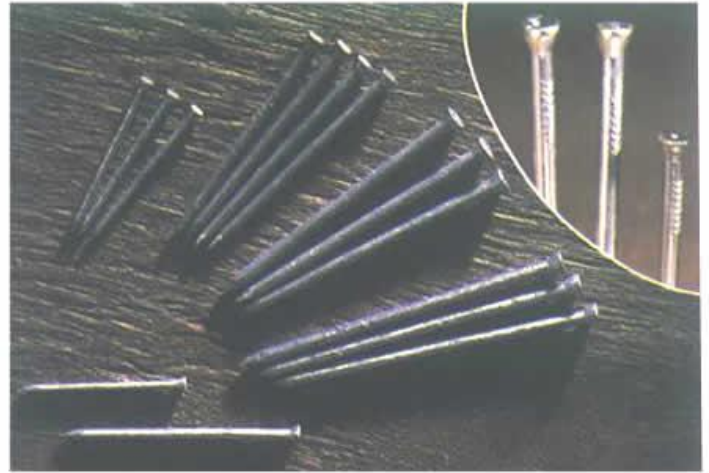

# 托盘钉

Art. No. NA 18


## Pallet Nails

Screw or Ring

Furnished: Smooth or Stiff Stock.


### SCREW AND RING SHANK PALLET NAIL

Designed specifically for strong, sturdy pallets. Flat Head-Diamond Point

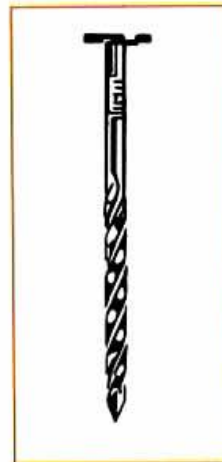

L.	D	No./B
2	0.12	144
2-1/4	0.12(11G)	129
2-1/2	0.12(11G)	117
3	0.12(11G)	79
3-1/4	0.135(10G)	61
3-1/2	0.148 (9G)	38
4	0.177 (7G)	35

包装：盒装，每盒净重 50 磅，48 盒装一托盘  
Packing: In box of 50 lbs net each and 48 boxes to a pallet.

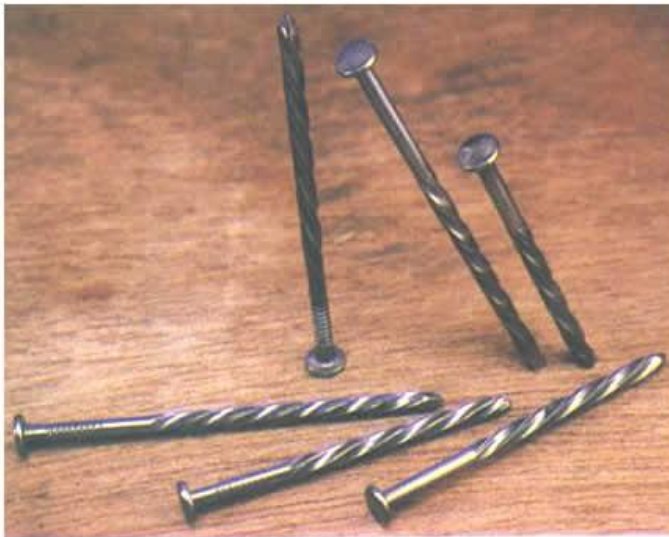


# 双头钉

Art. No. NA12

## Double-Headed Nails

Diamond point




Size	Gage No.	Length Overall in.	Length under Lower Head in.	Diam Top Head in.	Diam Lower Head in.	Distance between Heads in.	Approx. per lb
6d	11-1/2	2-7/64	1-3/4	3/16	17/64	1/4	156
8d	10-1/4	2-5/8	2-1/4	15/64	9/32	1/4	90
10d	9	3-3/16	2-3/4	1/4	5/16	5/16	59
16d	8	3-1/2	3	9/32	11/32	3/8	45
20d	6	4-1/64	3-1/2	5/16	3/8	3/8	28
30d	5	4-37/64	4	21/64	7/16	7/16	22



# 干墙钉 Art. No. NA

## Annular Thread Drywall Nails

Flat Head Countersunk Diamond Point

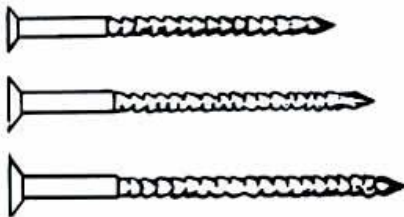


L	D	No./lb
1-1/4"	14G	520
1-1/4"	13G	368
1-3/8"	12-1/2G	329
1-5/8"	12-1/2G	274



# 锤头圆销钉 Art. No. ND 52

## Cold Headed Head Round Nails



Specifications according to DIN 1152

LXD (MM)	d(MM)	L 1d (MM)	Ka/package
10 × 15	1	15	1
12 × 20	1.2	20	1
14 × 25	1.4	25	1
16 × 30	1.6	30	1
18 × 35	1.8	35	2.5
20 × 40	2.0	40	2.5
22 × 45	2.2	45	2.5
22 × 50	2.2	50	2.5
22 × 55	2.2	55	2.5
25 × 55	2.5	55	2.5
25 × 60	2.5	60	2.5
28 × 65	2.8	65	2.5
31 × 80	3.1	80	5
34 × 90	3.4	90	5
38 × 100	3.8	100	5


# 铜丝销钉 Art No. ND1151

## Round Plain Head Nails

- 圆头 Round Head ND \_\_\_\_\_ 51A
- 平头 Flat Head ND \_\_\_\_\_ 51B
- 沉头 Countersunk ND \_\_\_\_\_ 51C

Soecufucatuib accirdubg to DIN 1151

L × d (MM)	d1 (MM)	L1 ± 1d1 (MM)	Kg / package
9 × 13	0.9	13	1
10 × 15	1	15	1
12 × 20	1.2	20	1
14 × 25	1.4	25	1
16 × 30	1.6	30	1
18 × 35	1.8	35	2.5
20 × 40	2	40	2.5
22 × 45	2.2	45	2.5
22 × 50	2.2	50	2.5
25 × 55	2.5	55	2.5
25 × 60	2.5	60	2.5
28 × 65	2.8	65	2.5
31 × 65	3.1	65	2.5
31 × 70	3.1	70	2.5
31 × 80	3.1	80	5
34 × 80	3.4	80	5
34 × 90	3.4	90	5
38 × 100	3.8	100	5
42 × 100	4.2	100	5
42 × 110	4.2	110	5
42 × 120	4.2	120	5
46 × 130	4.6	130	5
55 × 140	5.5	140	5
55 × 160	5.5	160	5
60 × 180	6	180	5
70 × 210	7	210	5
76 × 230	7.6	230	10
76 × 260	7.6	260	10
88 × 260	8.8	260	10

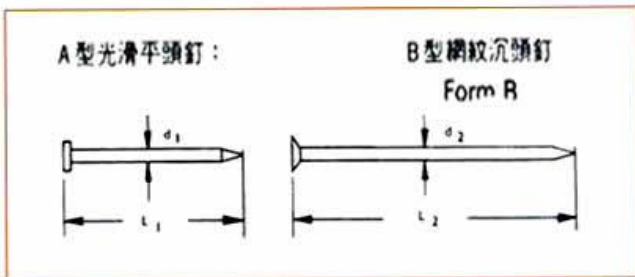



# 英制普通铁钉 Art. No. NB 12021

## Common Round Iron Wire Nails

用途：主要用于建筑，木箱，木器家具等。

供应规格：网纹 / 光面沉头，钻石尖，磨光。3/8"-7" 的 BWG4-20 各种圆钉。

包装：(1) 木箱装，每箱净重 112 磅，即 7 磅 × 16 盒，每 24 箱为一托盘。

(2) 盒装，每箱净重 20 公斤，以 48 箱为一托盘。

Uses: Mainly for building construction, wooden cases and furniture.

Specifications: Countersunk checkered or plain head. Diamond point, polished. 3/8"-7", BWG 4-20 for all kinds of round nails.



Packing (1): In wooden case of 112 lbs consisting of 16 packets × 7 lbs net each and 24 cases to a wooden pallet.

(2): Loose in box of 20 kgs net each and 48 boxes to a wooden pallet.

### 铁钉供应规格 Specifications of Wire Nails Available

L		D		L		D	
inches	M/M	BWG		inches	M/M	BWG	
3/8	9.525	20		2	50.800	12/11	
1/2	12.700	20/19/18		2-1/2	63.499	11/10	
5/8	15.875	19/18		3	76.200	10/8	
3/4	19.050	18/17		3-1/2	88.900	8/7	
7/8	22.225	18/17		4	101.600	8/6	
1	25.400	16		4-1/2	114.300	7/6/5	
1-1/4	31.749	15/14		5	127.00	6/5	
1-1/2	38.099	14		6	152.400	6/5/4	
1-3/4	44.440	13		7	177.800	5/4	

Please contact us if other specifications are required.

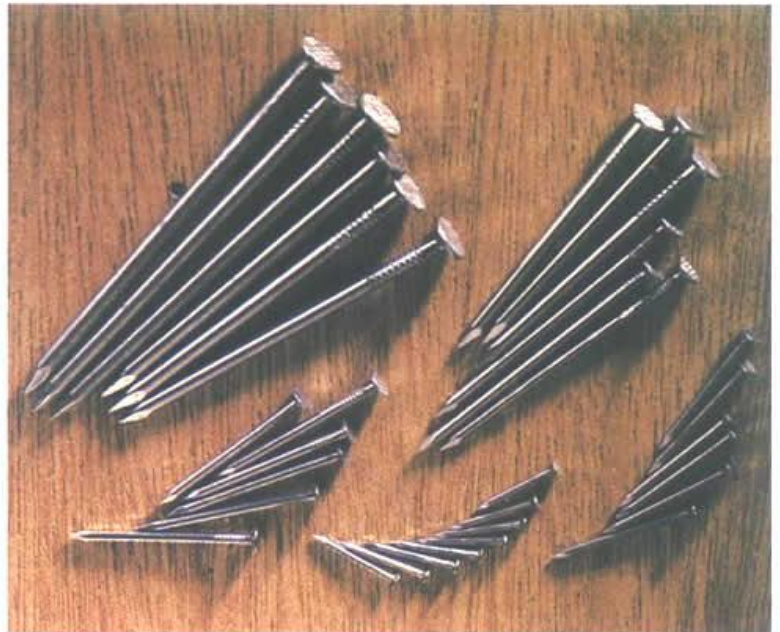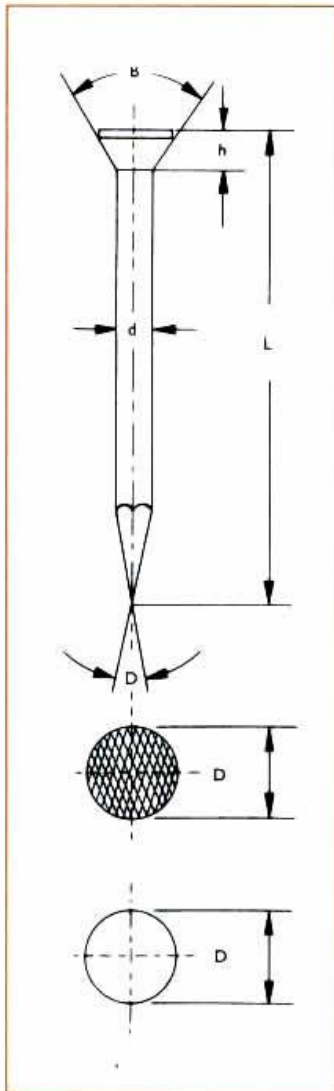

# 家具钉


Art. No. NA 14

## Finishing Nails

Brad Head. Cupped-Diamond Point



Size	L(in)	D(ASWG)	Diam Head of Gage No.	Approx. Number per lb.
2d	1	16-1/2	13-1/2	1,473
3d	1-1/4	15-1/2	12-1/2	880
4d	1-1/2	15	12	630
5d	1-3/4	15	12	635
6d	2	13	10	288
8d	2-1/2	12-1/2	9-1/2	196
9d	2-3/4	12-1/2	9-1/2	178
10d	3	11-1/2	8-1/2	124
12d	3-1/4	11-1/2	8-1/2	113
16d	3-1/2	11	8	93
20d	4	10	7	65

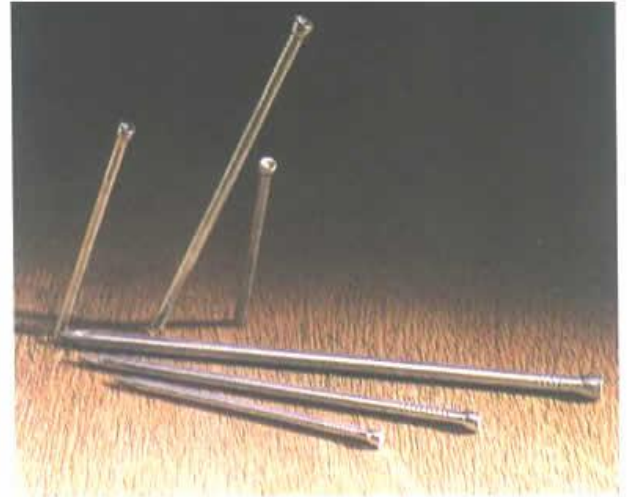

包装：盒装，每盒净重 50 磅，48 盒装一盘

Packing: In box of 50 lbs net each and 48 boxes to a pallet.

# 箱钉

Art. No. NA04

## Smooth Box Nails

Flat Head Diamond Point



Size	L (in)	D(ASWG)	Diam of Head(in)	Approx. Number per lb
2d	1	15-1/2	3/16	940
3d	1-1/4	14-1/2	7/38	588
4d	1-1/2	14	7/32	453
5d	1-3/4	14	7/32	389
6d	2	12-1/2	7/32	225
7d	2-1/4	12-1/2	17/64	200
8d	2-1/2	11-1/2	19/64	136
9d	2-3/4	11-1/2	19/64	124
10d	3	10-1/2	5/16	90
12d	3-1/4	10-1/2	5/16	83
16d	3-1/2	10	11/32	69
20d	4	9	3/8	50
30d	4-1/2	9	3/8	45
40d	5	8	13/32	34



包装：盒装，每盒净重 50 磅，48 盒装一托盘

Packing: In box of 50 lbs net each and 48 boxes to a pallet.

## NAILS IN ACCORDANCE WITH BS 1202

### SPECIAL NAILS

### GALV.JAGGED P'BOARD

30mm

40mm

### VENEER PINS

15mm

20mm

25mm

30mm

### UPHOLSTER NAILS AND COPPER DISC RIVETS

### ROOFING NAILS

## 骆驼牌沥青油毡纸

### CAMEL BRAND ASPHALT ROOFING FELT TALCLM POWDER SURFACED 2 PLY

SPECIFICATION:30LB, 35LBS, 36LBS, 40LBS, 50LBS, 55LBS, 60LBS, 70LBS, 83LBS.

PACKING: IMX 20M PER ROLLS:EACH ROLL COVERED BY PRIME PAPER AND TWO END COVERED BY CLOTH.

PRODUCTION PROCESS

PRIME PAPER-SATURATING ASPHALT-APPLYING ASPHALT-SPREADING

COVERING-COOLING-PACKING.

NOTICE INSTROAGE AND TRANSPORTATION

DURING THEIR STORAGE OR TRANSPORT, THE PRODUCTS SHOULD BE UPRIGHT PLACED AND STACKED UP RATHER THAN HORIZONTALIY LAID. THE SRACKING HEIGHT SHOULD NOT BE OVER TWO STORIES. IN ADDIUON. THE PRODUCTYS SHOULD BEKEPT AWAY FROM THE FIRE KEPT AT AN AMBIENT TEMPERATURE

NOT HIGHER THAN 45 AND PUT TO USE AT A TEMPERATURE NOT LOWER THAN10.



## 马蹄钉 Horse Shoe Nails

规格: Specification:

European Standard and America  
Standard Nail.(length:37 - 60.5mm)

PACKING :

100Pcs/Box,	24Boxes/Carton.
250Pcs/Box,	12Boxes/Carton.
500Pcs/Box,	8Boxes/Carton.



# 鞋钉

## DIAMOND BRAND AND SHOE TACK

FINISH:	BLUE AND BLACK				
SIZE:	3/8"	1/2"	5/8"	3/4"	1"
PACKING:	1LBS/BOX 112BOX/WOODEN CASE.				



# 泡钉

## DIAMOND BRAND CHAIR NAIL

FINISH: BRASS, NICKEL, BLACK, ANTIQUE.

SIZE,

SMALL HEAD

3/4" X 1.45MM

5/8" X 1.45MM

5/8" X 1.25MM

DAICY CAP

5/8" X 1.45MM

PACKING: 1000PCS BOX, 50 OR 100 BOX PER ONE WOODENCASE



## 铜钉和铝钉

Brass, Copper and Aluminium Nails

PACKING : 25 kg per carton



## 嵌板钉

Bright Panel Pins

15 mm x 1.25 mm	25 mm x 1.60 mm	20 mm x 1.60 mm
30 mm x 1.60 mm	40 mm x 1.60 mm	50 mm x 2.00 mm

## 骑马钉

Galv. Wire Sstaples


15 mm -50 mm	Galv. Square Twist	30 mm x 3.75 mm
--------------	--------------------	-----------------


## 四方扭丝钉

Galv. Square Twist

30 mm x 3.75 mm

PACKING : 25 kg per carton

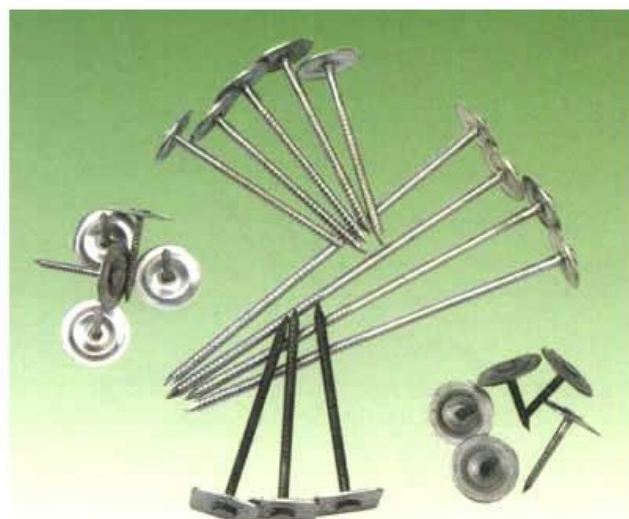

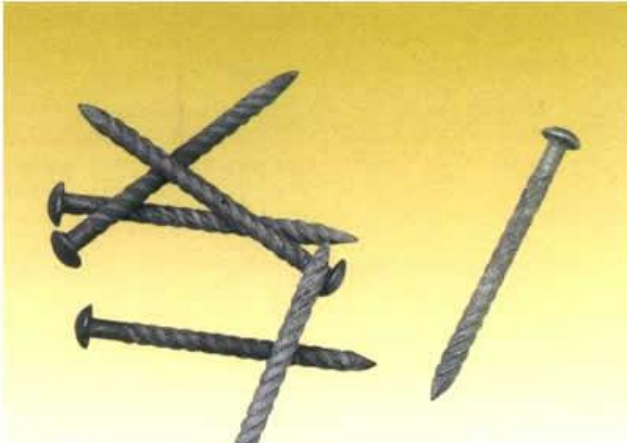

## 环纹钉

Bright Annular Ring

20 mm 50 mm	25 mm 65 mm	30 mm 75 mm	40 mm 100 mm
----------------	----------------	----------------	-----------------

## 托盘钉

Galv. Drive Screws

50 mm -200 mm

## 弹簧头钉

Galv. Spring Heads

50 mm x 3.35 mm	65 mm x 3.35 mm	75 mm x 3.35 mm
-----------------	-----------------	-----------------

**PACKING : 25 kg per carton**



## 地板钉

Cut Floor Brads

50mm	65mm	75mm	100mm
------	------	------	-------

## 锥形钉

Cut Clasp Nails

40mm	50mm	65mm	75mm	100mm
------	------	------	------	-------


**PACKING : 25 kg per carton**

## 普通平头圆钉

Round Wire/Galv. Round Wire  
Lost Head/Galv. Lost Head

20 mm x 1.60 mm	65 mm x 2.65 mm	100 mm x 4.00 mm
25 mm x 2.00 mm	65 mm x 3.35 mm	100 mm x 4.50 mm
30 mm x 2.36 mm	75 mm x 3.35 mm	125 mm x 5.60 mm
40 mm x 2.65 mm	90 mm x 4.00 mm	150 mm x 6.00 mm
50 mm x 2.65 mm		

PACKING : 25 kg per carton

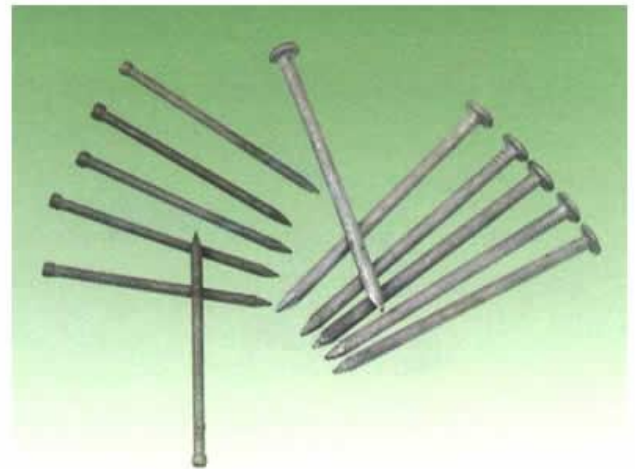

## 90形头钉 Oval Wire/Galv. Oval Wire

25 mm	65 mm	100 mm
30 mm	75 mm	125 mm
40 mm		150 mm
50 mm		

PACKING : 25 kg per carton



## 特大帽鞋底钉

Galv. Clout E.L.H.

13 mm x 3.00 mm 15 mm x 3.00 mm 20 mm x 3.00 mm	25 mm x 3.00 mm 30 mm x 3.00 mm	40 mm x 3.00 mm 50 mm x 3.00 mm
---	------------------------------------	------------------------------------

PACKING : 25 kg per carton




## 鞋底钉

Galv. Clout

30 mm x 2.65 mm 30 mm x 3.00 mm 40 mm x 2.65 mm	40 mm x 3.35 mm 50 mm x 2.65 mm 50 mm x 3.35 mm	65 mm x 3.75 mm 75 mm x 3.75 mm
---	---	------------------------------------

PACKING : 25 kg per carton

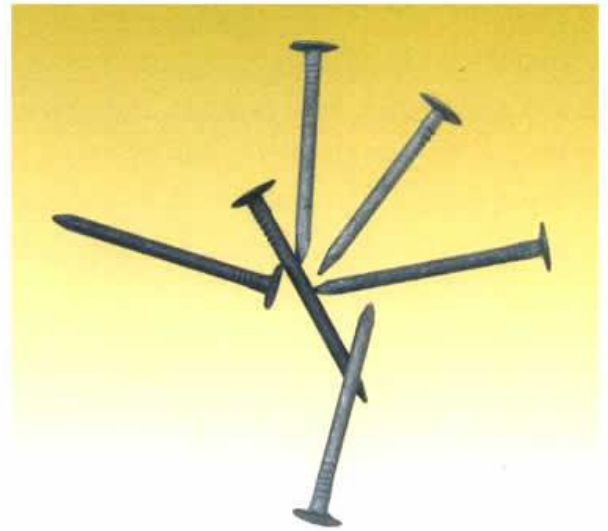



## 镀锌铁丝

Art. No. WZ

### Galvanized Iron / Steel Wire


BWG	6-7	8	9-10	11-14	15-16	17	18	19-23	24-26	27	28-29	30-32
Tensile Strength	30-50 kgs/mm <sup>2</sup>											
Galvanized g/m <sup>2</sup>	40	35	30	25	20	20	14	10	8	8	5	5
Packing	50 kgs/coil					25 kgs/coil				10 kgs/coil		2.5 kgs/coil



## 软质黑铁丝

Art. No. WS

### Black Annealed Iron / Steel Wire

BWG	16	17-20
Tensile Strength	30-47 kgs/mm <sup>2</sup>	
Packing	50 kgs/coil I.D. about 45 cm.	25 kgs/coil I.D. about 29 cm

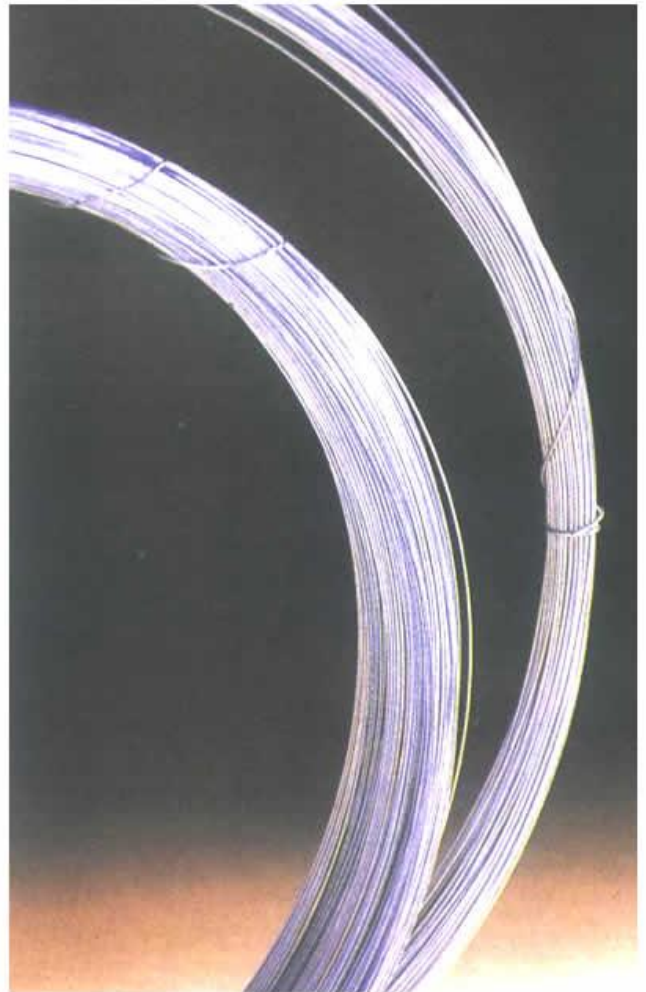

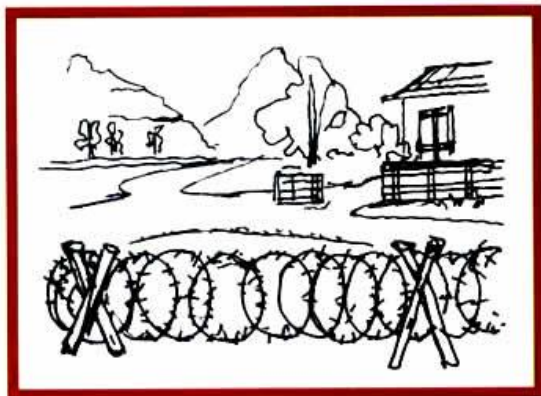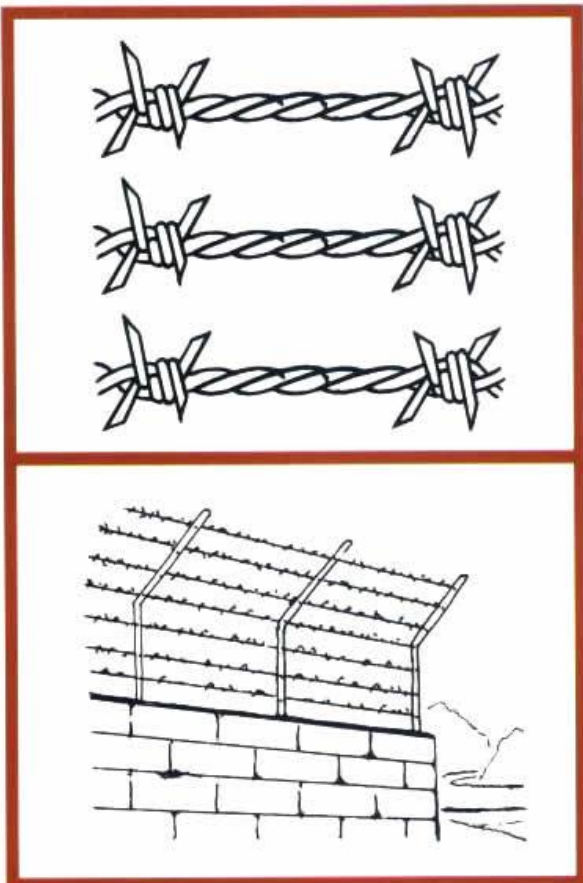

Art. No. WB

## 镀锌刺铁丝

### Galvanized Barbed Iron Wire

用于工业、农业、畜牧业、住房、园林围墙、军事等可按 ASTM、JIS、BS、GB 等标准生产各种型号

包装：(1) 空心捆装，25 公斤 / 捆  
(2) 定尺捆装 (402 米)

Specification: "LOWA" type.

The usual sizes available:

12 G × 14G

12-1/2 G × 14G

13-1/2 G × 14G

14 G × 14G

14-1/2 G × 14G

Barbs's distance: 3", 3-1/2"

4", 5", 6".

Tolerance: ± 1/2"

Uses: Suitable for industry, agriculture, animal husbandry, dwelling house and military works.

Goods can be produced according to following standards:

"ASTM"

"JIS"

"B.S."

"G.B."

Single strand with two barbs, single strand with four barbs, two strands with two barbs and two strands with four barbs are all available for export. Packing: (1) In coil of 25 kgs without reel.

(2) In coil with 402 M (1320 feet) in length without reel.

---

**涂塑丝** Art. No. WP

---

## PVC-Coated Iron Wire

1. 规格:

光身涂塑或镀锌涂塑

涂塑后铁丝外径 内部铁丝直径

4.70mm/ 3.50mm

}

1.00mm/ 0.70mm

涂塑层厚度: 0.15-0.60mm

2. 抗拉强度:

30-50 公斤、平方毫米

3. 包装

25 公斤 -50 公斤 / 卷。

1.Specification:

Plastic coating on bright or galvanized iron/steel wire is available.

Diameter: Plastic Coated Wire inner Iron Wire

4.70mm/3.50mm

}

1.00mm/0.70mm


The thickness of Plastic coated: 0.15-0.60mm

2.Tensile Strength

30-50kgs/s.q.mm<sup>2</sup>

3.Packing:

25kgs-50kgs/coil.

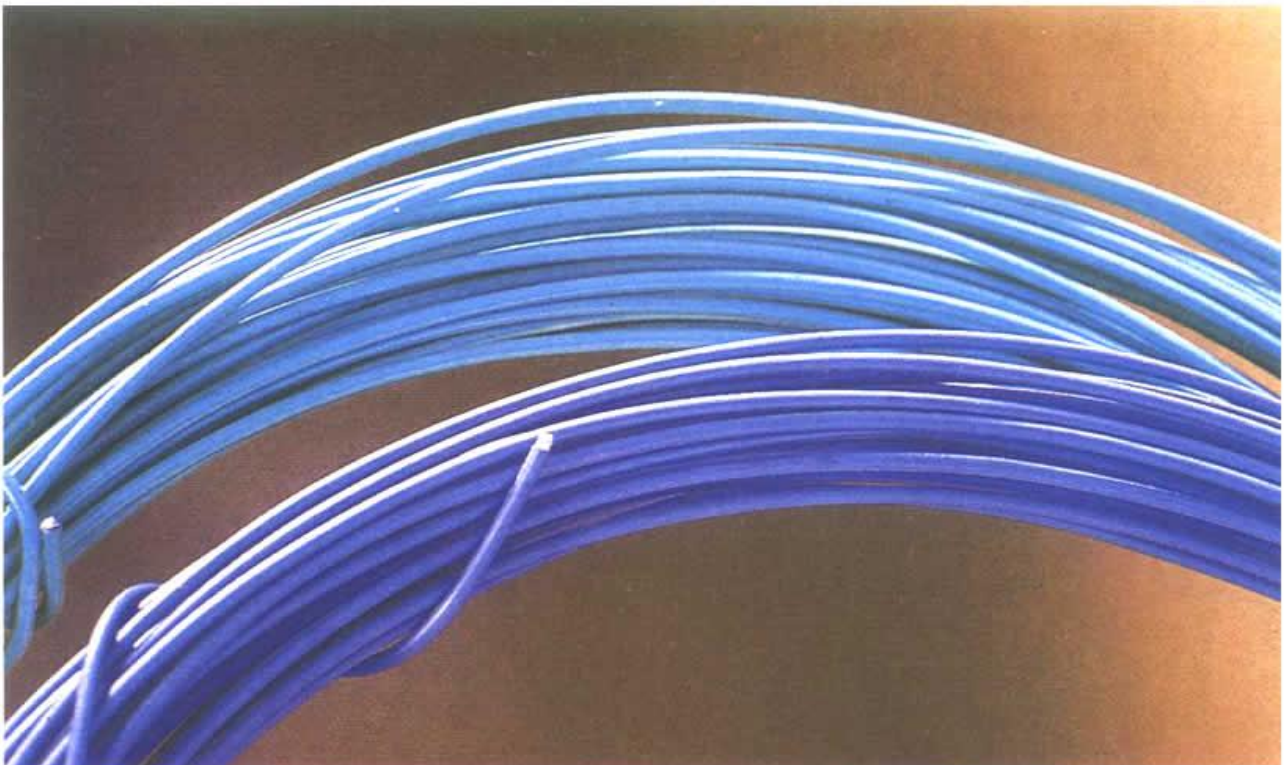

---

**镀锌扁丝 镀铜扁丝** Art.No.W01  
Art.No.W02

---

**Galvanized Flat Stitching Wire / Copper  
Coated Flat Stitching Wire**

1.5 MM

2 MM

2.5 MM

Packing: In CARTON of 30kgs net each.



---

**订书线** Art.No.W03

---

**Galvanized Round Stitching Wire/Copper  
Coated Round Stitching Wire**

BWG 20

21

23

24

25

26

PACKING: 25 kgs/coil or 200 kgs/reel

**公制普通圆钉** Art. No. NG 01 NG 02 **预成型骑马钉** Adrt No. NS 02


Common Round Iron Wire Nails

PREFORMED STARLES

按照中国国家标准生产

According to G.B. (China National Standard)


Zinc Coated

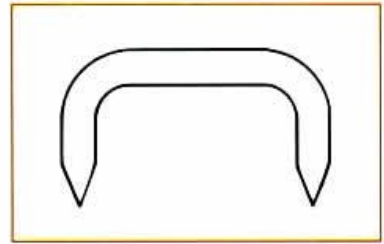

**栅栏骑马钉** Art No. NS 01

FENCE STAPLES

Bright Finish or Zinc Coated

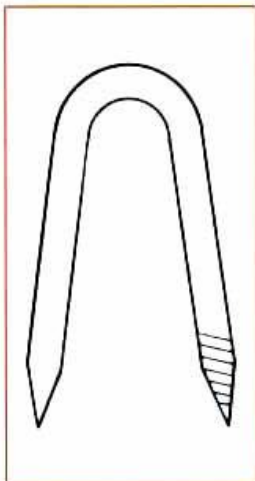

L	D	NO./LB
7/8	0.1483	122
1	0.1483	106
1-1/8	0.1483	97
1-1/4	0.1483	87
1-1/2	0.1483	72
1-3/4	0.1483	61

