


# PVC透明單管 CLEAR SINGLE PVC TUBING

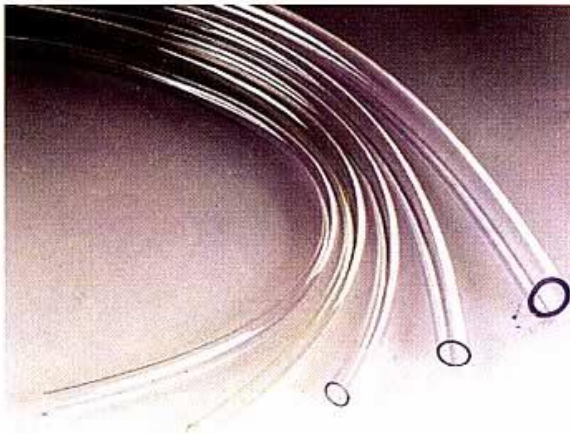

特征及應用:

質輕、柔軟、透明、價廉。應用于低工作壓力之機械、土木工程、水族器材等行業的配套產品。

Characteristic & Applications:

This hose is light, flexible, transparent with mirror-smooth cover, and the price is reasonable. To be used in low pressure conditions for fittings of machines, civil engineering and aquatic animals equipment.

型號 Article NO.	英制尺寸 Nominal dimension	膠管尺寸 Hose Dimension	長度 Length	工作壓力 W.P.	爆破壓力 B.P.	淨重 N.W.	每件體積 Measure 直徑×高度 D×H		
	(Inch)	內徑×外徑 I.D×O.D						mm	
1403	1/8	3×4.8	200	2	6	3.2	400×110		
1404	5/32	4×5.8	150				5	3.0	380×110
1405	3/16	5×7	100					3.6	410×110
1406	1/4	6×8		1.5	4	2.7		380×110	
1408	5/16	8×10				3.5	400×110		
1410	5/8	10×12	4.3			420×110			
1412	1/2	12×15	30	3	4.0	420×120			
1415	5/8	15×18			4.8	420×130			
1419	3/4	19×22			6.0	560×150			
1425	1	25×30	40	1.0	3	13.4	660×160		
1432	1-1/4	32×38				16.4	650×160		
1438	1-1/2	38×44				19.2	780×200		
1450	2	50×58		2.5		33.8	950×250		

## 不銹鋼喉箍 STAINLESS STEEL CLAMP


特征及應用:

鋼帶外緣經過整形, 光順平滑, 在使用中不會損傷軟管。選用歐洲鋼材, 性能可靠穩定, 經精密沖壓成型, 不會滑絲。產品設計精密, 擰動順暢, 應力平均, 密封能力特強, 可以重複使用。應用于汽車、輕工機械製造、家用設備、建築安裝等行業。

Characteristic & Applications:

Beaded Safety edges prevent the band from cutting into hose. Made of European steel, molded by precise pressing, with reliable and stable capability to ensure good seal. It's precisely designed, easy to be tightened or loosened. Radial forced are particularly evenly spread out with the hose clamp, ensuring quality of seal. Repeated use is available. Mainly used in cars, machinery, household facilities, construction and industry.

單個喉箍外徑 Available for hose size (O.D. mm)	包裝 PCS/箱 PACKING (QTY/Carton)	淨重kg/箱 N.W.kg/carton	單個喉箍外徑 Available for hose size (O.D. mm)	包裝 PCS/箱 PACKING (QTY/Carton)	淨重kg/箱 N.W.kg/carton
8-12	2000	18.0	50-70	500	10.0
10-16	2000	20.0	60-80	400	8.8
12-20	1600	20.8	70-90	300	6.9
12-22	1600	20.8	80-100	300	7.2
16-25	1600	22.4	90-110	300	7.5
16-27	1600	22.4	100-120	250	6.75
20-32	1200	18.0	110-130	250	7.0
25-40	1000	15.0	120-140	250	7.5
30-45	600	10.2	130-150	250	7.75
32-50	600	10.8	140-160	200	6.60
40-60	500	9.8	160-180	200	7.50

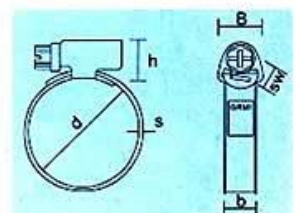

夾帶寬度(b) 9mm±0.5  
 夾帶厚度(s) 0.6mm±0.05  
 外殼寬度(B) 最高13mm  
 外殼高度(h) 最高11mm  
 頭幅(SW) 7mm  
 總裝尺寸LXKXH=332mm×250mm×260mm



# 透明網喉(1型、2型) BRAID REINFORCED PVC HOSE

## 特征及應用:

質輕，透明柔軟而富彈性，能在-5~50C 環境中卷放自如，視應用領域之壓力不同可選擇兩種工作壓力不同產品，1型壓力普通，2型壓力較高。應用於工、農、漁業和工程之給排水、給排油、供氣等。



## Characteristic & Applications:

To be light in weight, transparent and flexible with excellent resistance, can be wound or spread easily in -5~50°C temperature conditions. There are two types of hose with different working pressure according to different use. Type NO.1 can be used in general pressure conditions, Type NO.2 can be used in higher pressure conditions. To be used for supplying water, gas, oil etc. In agriculture and industry.

型號 Article NO.	英制尺寸 Nominal dimension	膠管尺寸 Hose Dimension		長度 Length	工作壓力 W.P.	爆破壓力 B.P.	淨重 N.W.	每件體積 Measure 直徑×高度 D×H	
	Inch	內徑×外徑 I.D×O.D							
		mm							
104-CS	5/32	4	9	100	12	50	6.3	400×130	
106-CS	1/4	6	10		8	45	6.1	420×130	
206-CS	1/4	6	11		10	65	8.3	440×130	
108-CS	5/16	8	12		7	40	7.6	450×140	
208-CS	5/16	8	13		10	58	10.0	480×130	
209-CS	3/8	9	14		10	48	11.2	500×130	
110-CS	3/8	10	14		5	35	9.1	470×140	
210-CS	3/8	10	15		9	45	12.2	520×140	
112-CS	1/2	12	16		7	38	10.9	520×160	
212-CS	1/2	12	17		8	43	14.2	530×160	
113-CS	1/2	13	17		5	30	11.5	540×160	
213-CS	1/2	13	18		8	40	15.0	570×160	
116-CS	5/8	16	20		50	5	28	7.0	500×140
216-CS	5/8	16	21		100	8	35	18.0	600×170
119-CS	3/4	19	24	50	4	25	10.3	590×170	
219-CS	3/4	19	25		8	32	12.5	600×180	
125-CS	1	25	30		4	23	13.5	660×170	
225-CS	1	25	31		6	28	15.0	660×190	
132-CS	1-1/4	32	38		3.5	18	20.5	770×220	
232-CS	1-1/4	32	39		5	26	25.0	770×230	
138-CS	1-1/2	38	45	40	3.5	15	22.8	840×180	
238-CS	1-1/2	38	46		5	20	26.2	840×200	
150-CS	2	50	59	30	3	13	28.8	1000×250	
250-CS	2	50	60		4	17	30.0	1000×250	

備注: 1型-輸水型網喉; 2型-通用型網喉;

Remark:NO.1-Convey Water Reinforced Hose;NO.2-General Reinforced Hose;

# 藍色扁帶(水帶管) LAY-FLAT WATER DISCHARGE HOSE



特征及應用:

柔軟、質輕、存放占用空間小，耐候性好，使用壓力高，是農業灌溉，建築工程排水的理想管材。



Characteristic And Applications:

To be light in weight and flexible with good cold and hot resistance, high working pressure, which is ideal tool for water discharge in agriculture and building.

連接配件



鋁質快速接頭

塑料快速接頭

連接示範

型號 Article NO.	英制尺寸 Nominal Size Inch	膠管內徑 Inside Dia mm ± 0.3	管壁厚度 Wall Thickness mm ± 0.2	壓力 Pressure		淨重 Weight/Roll 100m(kg) ± 0.1	包裝尺寸 Measurement D×H mm
				工作壓力 Working(Bar)	爆破壓力 Bursting(Bar)		
4251-WS	1"	25	1.2	4.0	22	15	500×70
4252-WS			1.7	6.0	25	17	580×70
4321-WS	1-1/4"	32	1.2	4.0	20	17	500×75
4322-WS			1.7	5.5	23	20	600×75
4381-WS	1-1/2"	38	1.2	4.0	18	19	520×80
4382-WS			1.7	5.5	20	25	620×80
4511-WS	2"	51	1.2	3.5	15	23	550×100
4512-WS			1.9	5.0	17	34	620×100
4641-WS	2-1/2"	64	1.4	3.5	14	27	560×115
4642-WS			1.9	5.0	16	40	670×115
4761-WS	3"	76	1.4	3.5	13	33	570×130
4762-WS			2.1	5.0	15	47	700×130
41021-WS	4"	102	1.6	3.0	11	55	600×180
41022-WS			2.3	4.5	14	80	800×180
41501-WS	6"	150	1.6	3.0	10	110	700×250
41502-WS			2.0	4.5	14	145	820×250
42001-WS	8"	200	1.7	3.0	10	165	800×350
42002-WS			2.1	4.5	13	190	900×350

# 黄色特制管 SPECIALIZED YELLOW AIR HOSE

## 特征及应用:

采用韧性极强的PVC材料和高級拉力聚脂增强纜制造，產品具有較高的工作壓力。管質輕，而且耐磨、耐腐蝕、耐硬化抗彎曲、耐破裂。配特殊材料制造，產品即使在寒冷環境依然卷放自如。應用于氣動裝置，氣體沖洗裝置，壓縮機，發動機配件，機械維修，農業藥物噴淋及土木工程風炮用管。



## Characteristic & Applications:

Features the pressure resistance of open mesh polyester braiding with the toughness of flexible PVC.

Offers supreme durability corrosion and abrasion with less weight than rubber. Resists kinking, cracking, rotting, hardening. Contains special material to ensure remaining soft & flexible even under extremely cold weather conditions. Available pneumatic tools, air wash system, compressors, actuators & motors, pesticide spraying etc.

型號 Article NO.	英制尺寸 Nominal Size Inch	內徑 Inside Dia mm	外徑 mm	壓力 Pressure		長度 Length mm	淨重 Weight/Roll	包裝尺寸 Measurement D×H mm	
				工作壓力 Working(Bar)	爆破壓力 Bursting(Bar)				
606-YA	1/4"	6.5	12	20	95	100	9.4	400×130	
675-YA	9/32"	7.5	13		90		11.0	450×130	
685-YA	5/16"	8.5	14		85		12.1	500×140	
610-YA	3/8"	10	16		80		15.3	520×140	
613-YA	1/2"	13	20		75		22.6	560×190	
616-YA	5/8"	16	25		60		36.0	750×180	
619-YA	3/4"	19	28.5		52		44.1	800×200	
625-YA	1"	25	34.5		48		55.3	950×200	
632-YA	1-1/4"	32	44		46		80.7	1100×280	
638-YA	1-1/2"	38	50		45		50	51.6	950×250
650-YA	2"	50	64					78.0	1000×300

\*Special specifications and OEM service available.

# 波紋管 RIPPLE HOSE



特征及應用:

質輕、彈性好、阻燃效果優良。是電器保護的理想套管，也應用于洗衣機、空調機的排水。



Characteristic & Applications:

This hose is light in weight, excellent resistance and good prevent burning results. To be widely used for wire casing pipe, draining away water for washing machines and air-condition.

型號 Article NO.	外徑 O. D.	長度 Length	淨重 N.W.	每件體積 Measure 直徑高度 D×H
	mm	m	Kg/roll	Mm
1315A	15	50	1.8	420×120
1315B	15	100	6.0	490×180
1320A	20	50	2.6	490×125
1320B	20	100	7.0	570×190
1325A	25	40	2.4	550×140
1325B	25	50	4.5	550×140
1332A	32	25	2.2	860×170
1332B	32	50	7.0	860×170
1340B	40	50	9.0	880×200
1350B	50	25	7.0	880×220
1363B	63		9.0	1000×280

備注: A-採用PE材質; B-採用PVC材質。

Remark: A-To be made of PE; B-To be made of PVC.



## 花園管 GARDEN HOSE

特征及應用：

質輕、顏色亮麗、

柔軟、耐候性能好。

是園林澆灌的理想配

套產品。



Characteristic & Applications:

This hose is light,colorful and flexible

with good cold or hot resistance.Available for watering in garden & household water supply.

型號 Article NO.	英制尺寸 Nominal dimension	膠管尺寸 Hose Dimension		長度 Length	工作壓力 W.P.	爆破壓力 B.P.	淨重 N.W.	每件體積 Measure 直徑×高度 D×H
		內徑×外徑 I.D×O.D						
	Inch	mm		m	bar	bar	kg/roll	mm
1113-GH	1/2	13	17	100	5	30	11.5	540×160
1116-GH	5/8	16	20	50	5	28	7.0	500×140
1119-GH	3/4	19	24		4	25	10.3	590×170

## 花園水管配件A系列 GARDEN HOSE & ACCESSORIES A



8800



B09



A08



A07



A02



A09



A01



B06



連接示範

# 花園水管配件B系列 GARDEN HOSE & ACCESSORIES B

特征及應用:

花園管口徑1/2" , 5/8" , 長度20-30米, 有墨綠、橙、藍等顏色供選擇。水車操作簡單, 輕巧方便, 美觀實用。適用於各種園林噴灑, 車輛衝洗以及各種日常清潔。

Characteristics & Applications:

Suit dia. 1/2" , 5/8" hose, Store in 20-30m length of the hose. Available in all kinds of color such as green, orange, blue & etc.

Light in weight, durable and easy to handle. To be used for water delivery in garden, washing car and daily uses.



RLC-230



9900



8801



8805



8807



9901



8903

# 橡膠黑色風壓喉 SPECIALIZEN BLACK PRESSUER AIR HOSE



**AIR HOSE**

特征及應用:

質輕、柔軟、高耐磨。應用于土木工程、礦山之輸送高壓空氣。

Characteristic & Applications:

This hose is light in weight and flexible with excellent wear resistance. To be used for conveying high pressure air in civil engineering or in mine.

型號 Article NO.	英制尺寸 Nominal dimension	膠管尺寸 Hose Dimension 內徑 × 外徑 I.D × O.D		長度 Length	工作壓力 W.P.	爆破壓力 B.P.	淨重 N.W.	每件體積 Measure 直徑 × 高度 D × H
	Inch	mm		m	bar	bar	kg/roll	mm
708-BP	5/16	8	14	100	20	75	12.9	480×140
710-BP	3/8	10	16		18	60	15.0	500×140
713-BP	1/2	13	19.5		18	55	20.7	530×190
716-BP	5/8	16	23.5	50	16	53	14.5	480×180
719-BP	3/4	19	29.0		16	48	23.5	650×180
725-BP	1	25	34.5		15	43	27.6	700×200
732-BP	1-1/4	32	43.0	40	15	40	32.3	770×200
738-BP	1-1/2	38	49.0		13	38	37.5	900×230
750-BP	2	50	63.0		10	32	57.5	950×300



# 浴缸進水喉 BATHTUB HOSE

特征及應用:

質輕、柔軟、耐高溫。消噪音。

是浴缸等衛浴潔具的優質配套產品。

Characteristic And Applications:

This hose is light in weight and flexible.

To be used for conveying water for massage bath.

型號 Article NO.	英制尺寸 Nominal dimension	膠管尺寸 Hose Dimension 內徑 × 外徑 I.D × O.D		長度 Length	工作壓力 W.P.	爆破壓力 B.P.	淨重 N.W.	每件體積 Measure 直徑 × 高度 D × H
	Inch	mm		m	bar	bar	kg/roll	mm
813-PH	1/2	16.3	21.5	30	9	36	6.8	420×130
819-PH	3/4	19	26.9			35	8.5	440×150
825-PH	1	25	33.6			32	10.2	480×150
838-PH	1-1/2	38	47.6	15		28	8.3	460×150



# 橡膠輸水管 RUBBER HOSE

## 特征及應用:

內外層使用優質天然橡膠，增強層使用高強度工業布，產品柔軟、耐用，適用於輸送常溫水及一般中性液體。

## Characteristic & Applications:

Made of high quality crude rubber, reinforced with high strength industrial fabric. It's flexible and durable. Mainly used to supply normal warm water or litmusless liquid.



內徑 I.D		層數 P	工作壓力 Mpa	長度 M	內徑 I.D		層數 P	工作壓力 Mpa	長度 M
mm	Inch				mm	Inch			
13	1/2	1	0.3	36.6	76	3	3	0.3	20
13	1/2	2	0.5	20	76	3	5	0.5	
13	1/2	3	0.7		89	3-1/2	3	0.3	
16	5/8	1	0.3		36.6	89	3-1/2	4	
16	5/8	2	0.5	20	89	3-1/2	6	0.7	
16	5/8	3	0.7		102	4	3	0.3	
19	3/4	1	0.3		36.6	102	4	4	0.5
19	3/4	2	0.5	20	102	4	7	0.7	
19	3/4	3	0.7		127	5	4	0.3	
25	1	1	0.3		36.6	127	5	5	0.5
25	1	2	0.5	20	127	5	8	0.7	
25	1	3	0.7		152	6	4	0.3	
32	1-1/4	2	0.5		152	6	5	0.5	
32	1-1/4	3	0.7		152	6	9	0.7	
38	1-1/2	2	0.3		203	8	6	0.3	
38	1-1/2	3	0.5		203	8	7	0.5	
45	1-3/4	2	0.3		203	8	10	0.7	
45	1-3/4	3	0.5		254	10	6	0.3	
51	2	3	0.5		254	10	8	0.5	
51	2	5	0.7		254	10	12	0.7	
64	2-1/2	3	0.3		6	305	12	8	0.3
64	2-1/2	5	0.7			305	12	10	0.5

## 家用石油氣管 GAS HOSE



特征及應用:

柔軟富彈性、安全亮麗，適用於家居煤氣輸送。

Characteristic & Applications:

This hose is flexible, nice and safe with excellent resistance.

To be used for supplying gas in house.

型號 Article NO.	英制尺寸 Nominal dimension	膠管尺寸 Hose Dimension 內徑 × 外徑 I.D × O.D		長度 Length	工作 壓力 W.P.	爆破 壓力 B.P.	淨重 N.W.	每件體積 Measure 直徑 × 高度 D × H
	Inch	mm		m	bar	bar	kg/roll	Mm
308-PH	5/16	8.5	14	50	2	6	6.1	380 × 120


## PVC紅/白條紋喉 PVC RED & WHITE HOSE

特征及應用:

質輕柔軟，顏色鮮艷，適合于低壓力的花園澆水和家居供水。

Characteristic & Applications:

This hose is colorful, light in weight and flexible. Suits low pressure watering in garden & household water supply.

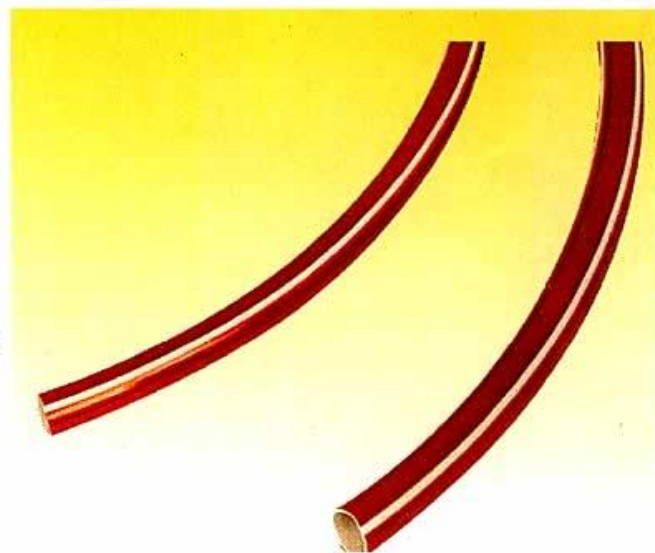

型號 Article NO.	英制尺寸 Nominal dimension	膠管尺寸 Hose Dimension 內徑 × 外徑 I.D × O.D		長度 Length	淨重 N.W.	每件體積 Measure 直徑 × 高度 D × H
	Inch	mm				Mm
1612-RW	1/2	12	15	40	3.1	
1615-RW	5/8	15	18		3.9	530 × 120
1619-RW	3/4	19	22		4.8	600 × 125
1625-RW	1	25	29	25	5.5	