










Packaging Tape



 Product	 Color	 Film	 Adhesive	 Total Thickness (mil)	 Application Temp (°C)	 Tensile Strength (lbs/inch)	 Elongation (% of base)	 Description
Packing	All/Printed	BOPP	Acrylic	1.77	-5-40	15.5	120	Packaging, carton sealing
Packing	Clear/Brown	BOPP	Rubber	1.96	-15-40	17.5	130	Low temperature packaging and carton sealing
Super Clear Packing	Crystal clear	BOPP	Acrylic	1.77	-5-40	15.5	120	Packaging, carton sealing, super clear
Low Noise	All	BOPP	Acrylic	1.77	-5-40	15.5	120	Produce low noise when unwinding. Packaging and carton sealing in quiet environments
No Noise	All	PET	Acrylic	1.77	-5-40	15.5	120	Produce no noise when unwinding. Packaging and carton sealing in quiet environments.
Machine Rolls	All	BOPP	Acrylic	1.96	-5-40	19	140	Use in automatic packing machines.

Aluminum Tape & Kraft Tape



Product	Color	Film	Adhesive	Total Thickness (mils)	Application Temp. (°C)	Tensile Strength (lbs/inch)	Elongation (% at break)	Description
Aluminum	Silver	Aluminum	Acrylic	1.96	-5-40	13	9	Temporarily repairs exhaust pipes, acts as backing material when filling rust holes, seals joints of heating and ventilation ducts.
Kraft	Brown	Kraft	Hotmelt	5.1	-5-40	16	10	Strong adhesive, cold-resistant, environmentally friendly. Use for light carton packing, wrapping plastic.




Double Side Tape

Product	Color	Film	Adhesive	Total Thickness (mils)	Application Temp. (°C)	Description
Double Side Tissue	White	Tissue	Solvent /Acrylic	3.74 4.33	-5-40	Sturdy alternative to glue. For mounting, decorating, holding and joining of light weight objects.
Double Side Foam	White	Foam	Solvent	39.3 /125	-5-40	Sturdy alternative to glue. Thicker film providing cushion when mounting, decorating, holding and joining of light weight objects.
Double Side BOPP	Clear	BOPP	Solvent	3.54	-5-40	BOPP film coated with adhesive on both sides. For mounting, decorating, holding and joining of light weight objects.
Double Side Cloth	White	Cotton Thread	Rubber	13.2-14 9.6-10.4	-5-40 -5-40	Strong adhesive, waterproof. Can be used for carpet joining. Economic. Ideal for repairing, holding and stabilizing.



Masking Tape

Item No	Size	Carton Size (cm)			C/30 35CBM	C/40 32.5CBM	C/40 HQ 32.5CBM
		Length	Width	Height			
01MTXK	18mm x 12m x 1roll, 96 set/ctn	35.8	22.6	32	1101	2260	2646
01MTYK	48mm x 15.2m x 1roll, 72 set/ctn	38.5	29	30	851	1747	2045
03MTJH	24mm x 20m x 3rolls, 24 set/ctn	30.2	20.7	30.2	1510	3099	3628

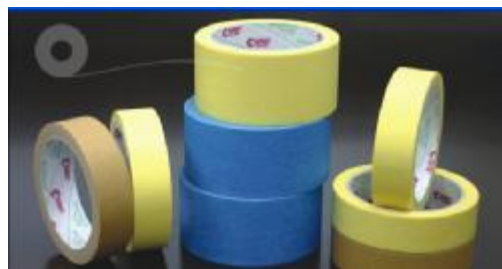

Product	ID No	Color	Adhesive	Total Thickness (mm)	Tack (GB#)	Application Temp (°C)	Tensile Strength (lbs/inch)	Peel Adhesion 180° (lbs/inch)	Description
UV Resistant	MT-103	White/Blue /Green	Rubber	5.2±0.4	15	0-70	17	1.3±0.2	UV-resistant paint masking for metal, glass and wood. Also ideal for outdoor paint masking, permits clean removal up to 21 days after application.
Medium Tack	MT-080	Natural-coloured	Rubber	5.2±0.4	15	0-80	17	1.7±0.2	Paint masking for metal, rubber and plastic. Also ideal for indoor paint masking, light packaging, holding, binding and drafting.
High Quality	MT-120	Natural-coloured	Rubber	5.4±0.4	17	0-80	17	1.7-2.2	Paint masking for metal, wood and general purpose. Also ideal for areas that needed premium tape.
Automotive Grade	MT-200	Natural-coloured	Rubber	5.4±0.4	15	80(1hr)	17	1.8	Automotive painting grade masking, for automotive painting that do not require use of bake oven.
Colorful	MT-300	Yellow/Blue /Green/Brown	Rubber	5.2±0.4	15	0-70	17	1.7±0.2	Masking for indoor paint masking, light packaging, holding, binding color coding, drafting, children's craft and stationery.
Medium Temperature	MT-514	Natural-coloured	Rubber	5.4±0.4	10	100(1hr)	17	1.9±0.2	Medium temperature industrial grade, application for appliance and electrical industrial which needed high temperature resistance and clean removal.
Medium Temperature	MT-520	Natural-coloured	Rubber	5.4±0.4	10	120(1hr)	17	1.7±0.2	Medium high temperature industrial grade, professional application for automotive painting, appliance and electrical industrial which needed higher temperature resistance or various chemical resistance and clean removal.
High Temperature	MT-617	Natural-coloured	Rubber	6.0±0.4	8	0-170	17	1.7±0.2	High temperature professional industrial grade, for automotive painting and oven baking application, appliance and electrical industrial, semiconductor protection, PCB board which needed higher temperature resistance or various chemical resistance and clean removal.



Item No	Size	Carton Size (cm)			C/20 20:CBM	C/40 40:CBM	C/40 HQ 40:CBM
		Length	Width	Height			
01BWYK3	50mm x 10m x 1roll, 36set/ctn	30.7	20.7	31.5	14.24	29.22	34.22
01BWXX2	50mm x 9.14m x 1roll, 48set/ctn	54.2	37.5	22	63.7	130.8	153.2
01BWXX1	48mm x 4.57m x 1roll, 48set/ctn	32.8	25.6	27.8	12.21	25.06	29.34
02BWXX01DM	48mm x 4.57m x 2rolls, 48set/ctn	31.8	31.8	39.2	71.9	14.76	17.28



01BWXX1



02BWXX01DM



01BWXX2



01BWYK3

Remarks: Data on opposite are tested according to the test methods of GB4852-84, GB-2792-81, GB-4851-84. The result is average numerical value. It does not represent the products' guarantee value, please test on a small inconspicuous area before using. It may be necessary to remove tape immediately after use.

Storing and use environment: Stored in original packing in cool, dry area away from sunlight. Applied onto clean, dry and grease & oil free surface.

Storage life: 1 year












No.	Color	Mesh	Adhesive	Total Thickness (mm)	Tack (OB#)	Tensile Strength (lb/inch)	Red Adhesion 180° (lb/inch)	Description
CT-101	Tan /Silver /Red	43	Rubber	10.8±0.4	>25	15	≥4.4	High adhesion and tensile strength, hand tear-able easily and waterproofing. Not easy to twist during application, excellent conformability. Ideal for carpet stabling, clean removal within one week. Great for repairing, splicing and color coding.
CT-102		70		11.6±0.4	>25	19	≥4.4	
CT-201	/Yellow /Blue /Green /Black /White	43	Rubber	10.0±0.4	>20	15	2.4-2.9	High tensile strength, strong adhesion, hand tear-able easily and waterproofing. Not easy to twist during application, excellent conformability. Ideal for air condition duct work and pipe jointing, plumbing, wrapping and repairing.
CT-202		70		10.8±0.4	>20	19	2.4-2.9	
CT-301	The Rubber in Red or White	43	Rubber	10.4±0.4	>20	15	3.5-4.0	High adhesion and tensile strength, hand tear-able easily and waterproofing. Not easy to twist during application, excellent conformability. High performance for industrial, heavy duty packaging, bundling, sealing, seaming, holding and pipe repairing.
CT-302		70		11.2±0.4	>20	19	3.5-4.0	
CT-401		43	Rubber	9.6±0.4	>20	15	2.4-2.8	High adhesion and tensile strength, hand tear-able easily. Not easy to twist during application, excellent conformability. Ideal for heavy duty packaging, bundling, sealing, seaming, holding and waterproofing.
CT-402		70		10.0±0.4	>20	19	2.4-2.8	
CT-800	Camouflage Printing	43	Rubber	11.6±0.4	>20	19	1.9-2.6	High adhesion and high tensile strength, hand tear-able easily. Not easy to twist during application, excellent conformability. Printed with camouflage or other design, ideal for army, navy and hunters packaging, bundling, sealing, holding and waterproofing.

Warning Tape

Product	Color	Film	Adhesive	Total Thickness (mm)	Application Temp(°C)	Description
Warning	Red&White, Black&Yellow, Blue&White, Green&White	PVC /PE	Solvent /	5.5	-5-40	Definitive colour patterns that alert of danger.
Reflective Warning	Red&White, Black&Yellow, Blue&White, Green&White	PET /Acrylic	Solvent	5.5	-40-70	Reflective brightness by light. Suitable for Park, Vehicle, road traffic sign, working safe sign and all danger area alerting for day and night
Reflective Sheeting	White, Yellow, Red, Green, Black, Brown, Blue	PET /Acrylic	Solvent	4-6	-40-70	Can be printed convenient to cut in computer and colorful, also for working safe sign, advertisement sign, housing estate, garden sign and so on















 Product	 Color	 Film	 Adhesive	 Total Thickness (mils)	 Application Temp (°C)	 Tensile Strength (lb/inch)	 Elongation (% at break)	 Description
Version I	Grey/Black	PVC	Acrylic	48-58	-5-60	20	180	Provides high friction on various surfaces prevent from slipping traction.
Version II	White/Black /Red/Yellow	PET	Acrylic	25-27	-5-100	33	150	

Item No	Size	Carton Size (cm)			C/20' 20.5CBM	C/40' 50.5CBM	C/40' HQ 61.5CBM
		Length	Width	Height			
10SRJH1	100mm x 300mm x 10pcs, 20set/ctn	34.2	33	23.5	1075	2206	2583
10SRJH2	50mm x 300mm x 10pcs, 60set/ctn	35	34.2	23.5	1013	2080	2435
10SRJH3	25mm x 300mm x 10pcs, 120set/ctn	38.5	34.2	23.5	921	1891	2214
01SRJH	50mm x 4.57m x 1roll, 36set/ctn	41.5	28	35	701	1438	1684
01SRYK1	50mm x 4.57m x 1roll, 36set/ctn	37	25	31.2	988	2027	2374
01SRYK2	25mm x 4.57m x 1roll, 72set/ctn	37	25	31.2	988	2027	2374












Polyester Film Tape

 Product	 Color	 Film	 Adhesive	 Total Thickness (mils)	 Application Temp(°C)	 Tensile Strength (lbs/inch)	 Elongation (%atbreak)	 Dielectric Breakdown (KV)	 Insulation Resistance (MO)
PET PCB Acrylic adhesive	Clear/Green	PET	Polyacrylate	2.7-2.8	-70-130	24	150	≥5.5	≥1.0
Polyimide Tape	Golden	Polyimide	Silicone	2.5-2.6	-70-250	24	90	≥7.5	≥1.0



PVC TAPES

Item No	Size	Carton Size (cm)			C/20 20.5CEBM	C/40 50.5CEBM	C/40 HQ 60.5CEBM
		Length	Width	Height			
02PVCJH	19mm x 10m x 2rolls, 80set/ctn	28.5	26.5	24	1572	3227	3779
04PVCXK	18mm x 4.6m x 4rolls, 48set/ctn	34.6	26.8	24.3	1239	2544	2979
03PVCXK2	18mm x 4.6m x 3rolls, 72set/ctn	39.2	31	18.3	1247	2561	2993
06PVCXK	18mm x 4.6m x 6rolls, 72set/ctn	38.2	35	24.6	867	1779	2083

 Product	 Color	 Film	 Adhesive	 Total Thickness (mils)	 Application Temp(°C)	 Tensile Strength (lbs/inch)	 Elongation (%atbreak)	 Description
PVC	Red/Yellow/Green /Blue/White/Black	PVC	Solvent	4.72	-5-40	13	150	General purpose, safe, flexible and available in various colors.

